



## StecaGrid 300 UK and StecaGrid 500 UK

The MiniString inverter series comprises the StecaGrid 300 UK and StecaGrid 500 UK inverters, with rated outputs of 300 W and 500 W, respectively.

StecaGrid 300 UK and StecaGrid 500 UK are built in a modular manner, and simple to install. With distribution over three phases, the system can at any time be expanded as desired, and thus flexibly adapts to your solar power system investment. StecaGrid 300 UK and StecaGrid 500 UK have an independent MPP tracker and achieve a very high efficiency of up to 95.8 %.

### Product features


- Flexible and expandable
- High efficiency
- MiniString concept
- Low weight
- Simple installation
- Wall-mounting with top-hat rail

### Electronic protection functions

- Integrated temperature monitoring with output derating

### Displays

- Multi-coloured LED shows operating status

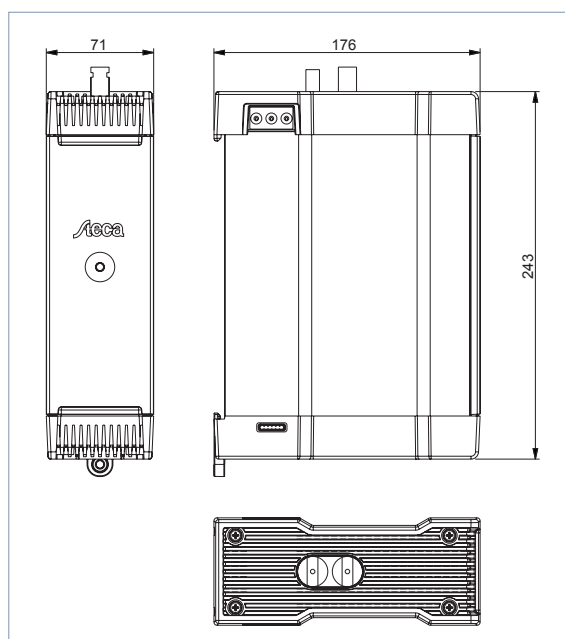

	StecaGrid 300 UK	StecaGrid 500 UK
<b>DC input side (PV-generator)</b>		
Maximum start voltage	100 V	170 V
Maximum input voltage	135 V	230 V
Minimum input voltage	45 V	75 V
Minimum input voltage for rated output	64 V	106 V
MPP voltage	45 V ... 100 V	75 V ... 170 V
Maximum input current	5 A	
Maximum input power	320 W	530 W
Maximum recommended PV power	375 Wp	625 Wp
Derating / limiting	automatic when - input power is higher - the device is not cooled sufficiently - input currents > 5 A (higher currents are limited by the equipment and therefore will not damage the inverter)	
<b>AC output side (Grid connection)</b>		
Grid voltage	207 V ... 264 V	
Rated grid voltage	230 V	
Maximum output current	1.5 A	2.5 A
Maximum output power	300 W	500 W
Rated power	300 W	500 W
Rated frequency	50 Hz	
Frequency	47 Hz ... 50,5 Hz	
Feeding phases	single-phase	
Power factor	> 0.95	
Distortion factor	< 6 % (max. power)	< 5 % (max. power)
<b>Characterisation of the operating performance</b>		
Maximum efficiency	94.8 %	95.8 %
European efficiency	93.4 %	94.5 %
MPP efficiency	99 %	
Power derating at full power	from 40°C	
Switch-on power	2 W	
Standby power	0 W	

	StecaGrid 300 UK	StecaGrid 500 UK
<b>Safety</b>		
Isolation principle	no galvanic isolation, transformerless	
<b>Operating conditions</b>		
Area of application	indoor rooms, with or without air conditioning	
Ambient temperature	-20 °C ... +45 °C	
Relative humidity	0 % ... 95 %	
Noise emission	< 32 dBA	
<b>Fitting and construction</b>		
Degree of protection	IP 20	
DC Input side connection	MC 4 (Solarline 2)	
AC output side connection	Wieland Electric GST 18i3V plug	
Data connection	Steca data coupling [provided with the inverter]	
Dimensions (X x Y x Z)	176 x 243 x 71 mm	
Weight	1.4 kg	
DC circuit breaker	no	
Cooling principle	natural convection	
Test certificate	CE mark	

[areas of application]

